


RoHS 2.0

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A1.	/.	重新整理图面	21.01.05	LiHui
A2.	/.	HD	22.08.15	LZR

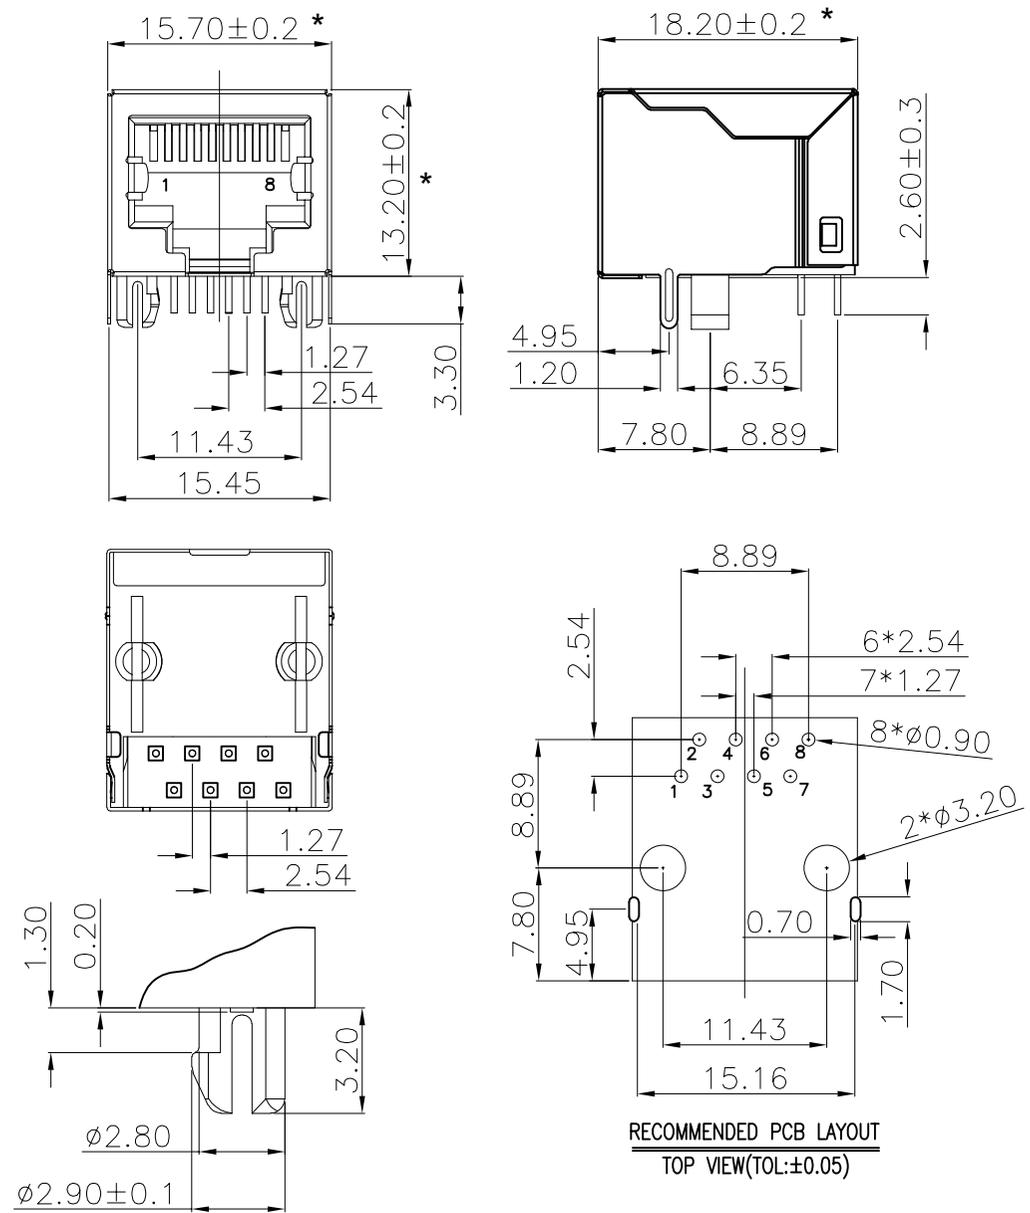

- NOTES:
- MATERIAL:
 - HOUSING: PBT ,COLOR IS BLACK ;
 - CONTACT: PHOSPHOR BRONZE,ø0.46±0.02mm;
 - SHELL: SUS T=0.2mm;
 - FINISH: PLATED GOLD OVER NI;
 - RECINNEBDED PCB THICKNESS: 1.2~1.60mm;
 - ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 35MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC.;
 - MECHANICAL:
 - MATING/UNMATING FORCE: 22N MAX.;
 - RETENTIION STRENGTH: 50N MIN.;
 - OPERATING LIFE: 750 CYCLES MIN.;
 - SALT SPRAY TEST: 12H;
 - SOLDERABILITY: 245±5°C,5±0.5S;
 - RESISTANCE TO SOLDER: 260±5°C,10±1S;
 - ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40°C~+85°C;
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C;
 - THE MARK WITH "*" IS THE KEY INSPECTION DIMENSION FOR QC.

C	外壳	不锈钢	镀镍	
B	端子	磷铜	镀镍 镀金(G/F)	
A	基座	PBT	黑色	
序号	品名	材质	电镀/颜色	备注

深圳市虹成电子有限公司

UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30	NAME:	P/N: HC-WK88-H18-K		
	RJ45-58C-单口(全包不锈钢)		DWG NO.:	
ANGULAR: X.xx' ±1' X.x' ±3' X.' ±5'	THIRD ANGLE PROJECTION	UNIT:	SCALE:	SIZE:
		mm	1:1	A4
DRAWN:	CHECKED:	SHEET:	REV.:	
		1/1	A1	
		APPROVED		