


RoHS 2.0

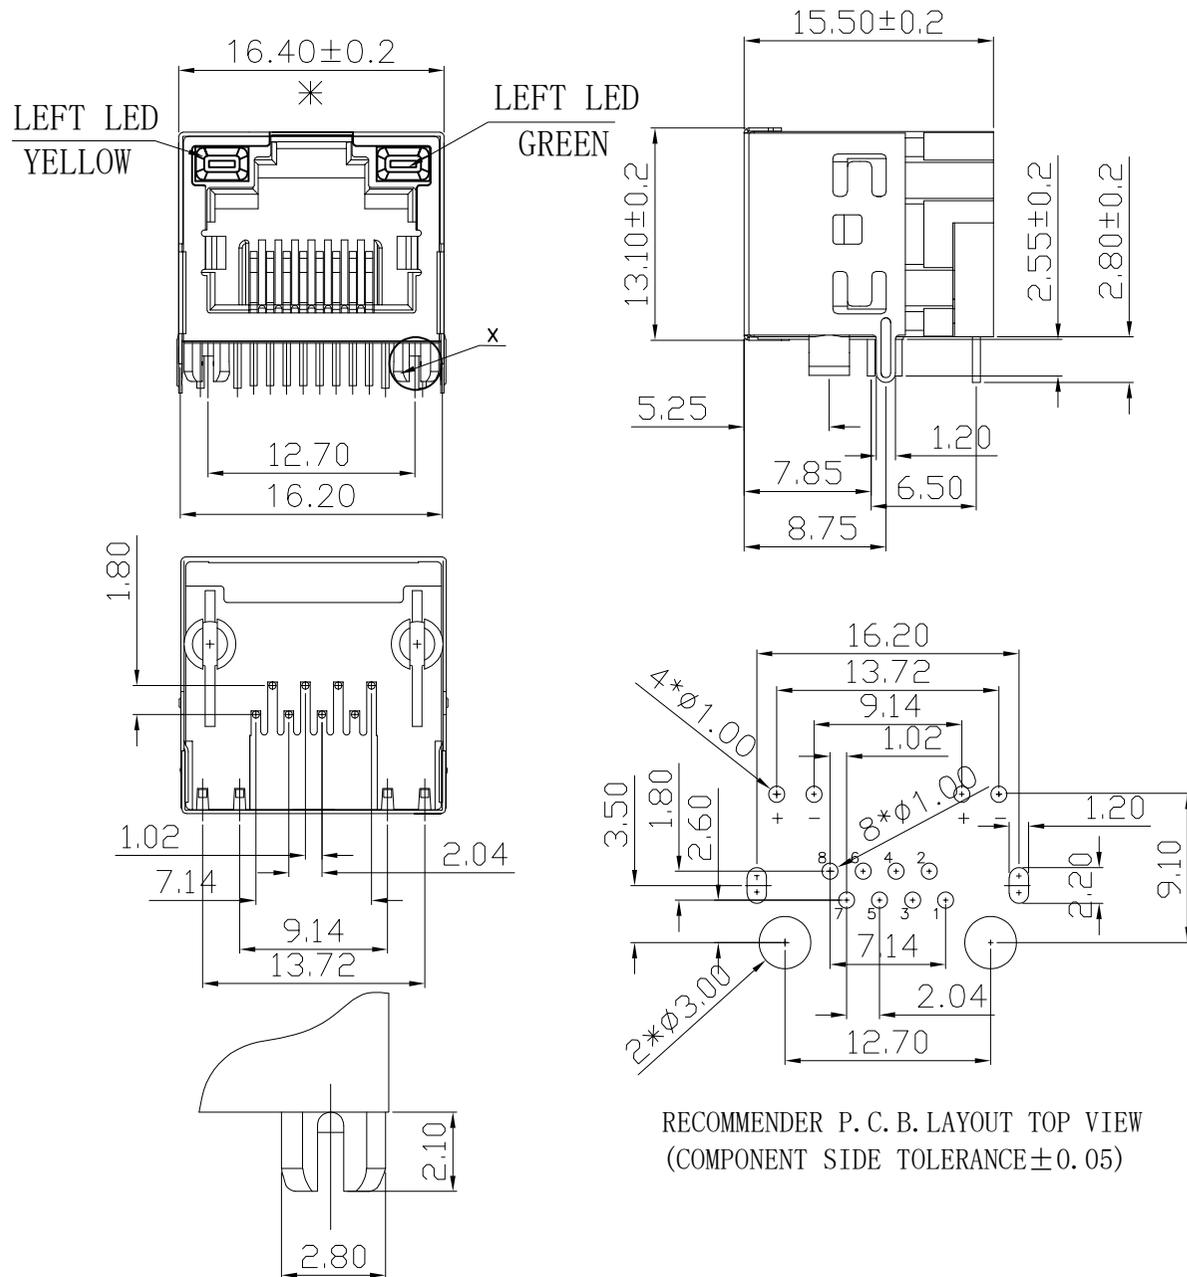

DETAIL "X"
SCALE 2:1

REV.	ECN	NO.	DESCRIPTION	DATE	DESIGN
A1.	/.		重新核对图面	21.01.09	LiHui
A2.			HD	22.06.09	LZR
A3.	/.		重新核对图面	22.10.15	LZR

- NOTES:
- MATERIAL:
 - HOUSING: PBT ,COLOR IS BLACK;
 - CONTACT: PHOSPHOR BRONZE, $\phi 0.46 \pm 0.02$ mm;
 - SHELL: SUS ;
 - FINISH:
 - CONTACT: PLATED GOLD OVER NI;
 - SHELL: NI OVER ALL;
 - RECINNEDDED PCB THICKNESS: 1.60mm;
 - ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 35MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC;
 - MECHANICAL:
 - MATING/UNMATING FORCE: 25N MAX.;
 - RETENTIION STRENGTH: 50N MIN.;
 - OPERATING LIFE: 750 CYCLES MIN.;
 - SALT SPRAY TEST: 12H;
 - SOLDERABILITY: $245 \pm 5^{\circ}\text{C}, 5 \pm 0.5\text{S}$;
 - RESISTANCE TO SOLDER: $260 \pm 5^{\circ}\text{C}, 10 \pm 1\text{S}$;
 - ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
 - OPERATION TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$;
 - MATES WITH:MODULAR PLUGS THAT CONFORM TO FCC REGULATION PART 68.500;
 - THE MARK WITH "*" IS THE KEY INSPECTION DIMENSION FOR QC.

C	外壳	SUS	镀镍	
B	端子	磷铜	镀镍 镀金(G/F)	
A	底座	PBT	黑色	
序号	品名	材质	电镀/颜色	备注

深圳市虹成电子有限公司

UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30	NAME: RJ45半包带灯B壳		P/N: HC-WK88-H16-DB	
	THIRD ANGLE PROJECTION 		UNIT: mm	SCALE: 1:1
ANGULAR: X.xx' ±1' X.x' ±3' X.° ±5'	DRAWN:		CHECKED:	APPROVED
		SIZE: A4	SHEET: 1/1	REV.: A1