
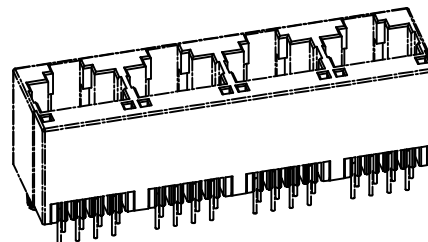


RoHS 2.0






REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A2.		重新核对图面	2021 01/13	LiHui
A3.		重新核对图面	2022 10/27	LZR

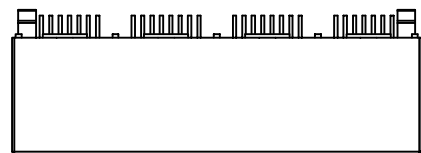

3D

NOTES:

- MATERIAL:
 - HOUSING: PBT ,COLOUR IS YELLOW UL94-V0;
 - CONTACT: PHOSPHOR BRONZE, $\phi 0.46 \pm 0.02\text{mm}$;
- FINISH: GOLD PLATED OVER NI;
- RECINNED PCB THICKNESS: 1.60mm;
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 35MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC.;
- MECHANICAL:
 - MATING/UNMATING FORCE: 22N MAX.;
 - RETENTION STRENGTH: 50N MIN.;
 - OPERATING LIFE: 750 CYCLES MIN.;
- SALT SPRAY TEST: 12H;
- SOLDERABILITY: $245 \pm 5^\circ\text{C}, 5 \pm 0.5\text{s}$;
- RESISTANCE TO SOLDER: $260 \pm 5^\circ\text{C}, 10 \pm 1\text{s}$;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: $-40^\circ\text{C} \sim +85^\circ\text{C}$;
 - OPERATION TEMPERATURE RANGE: $-25^\circ\text{C} \sim +70^\circ\text{C}$;
- THE MARK WITH "*" IS THE KEY INSPECTION DIMENSION FOR QC.
- MATES WITH:MODULAR PLUGS THAT CONFORM TO FCC REGULIOM PART 68.;

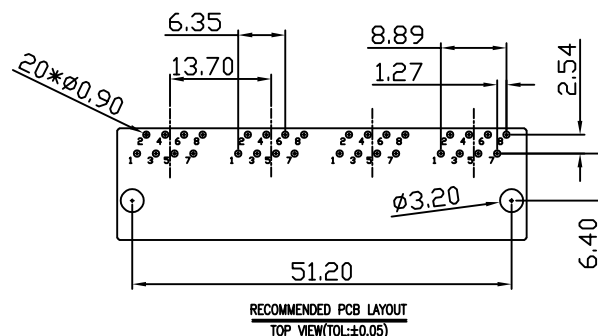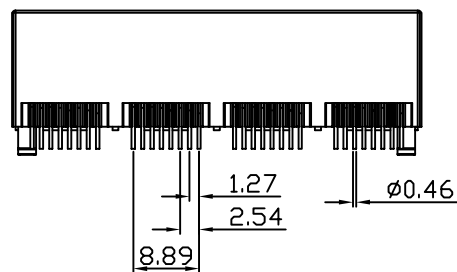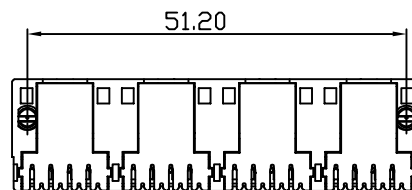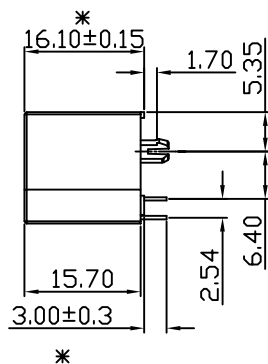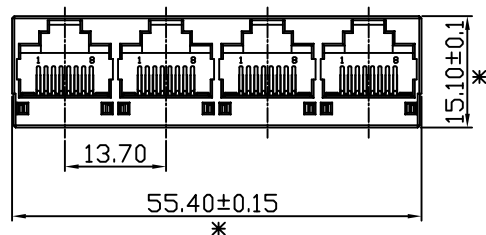

B	端子	磷铜	镀镍 镀金(G/F)	
A	基座	PBT	黄色	
序号	品名	材质	电镀/颜色	备注

深圳市虹成电子有限公司

UNLESS OTHERWISE GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30	NAME:	P/N: HC-WK88-HI61-1X4-Y			
	RJ45-52B-4口一号黄		DWG NO.:		
ANGULAR: X.xx' ±1' X.x' ±3' X.' ±5'	THIRD ANGLE PROJECTION	UNIT:	SCALE:	SIZE:	SHEET: REV.:
		mm	1:1	A4	1/1 A2
DRAWN:		CHECKED:		APPROVED	