


RoHS 2.0

| REV. | ECN NO. | DESCRIPTION | DATE         | DESIGN |
|------|---------|-------------|--------------|--------|
| A1.  | /.      | 新版发行        | 2022. 12. 02 | LZR    |
| A2.  | /.      | 新增标注        | 2024. 03. 28 | LZR    |

| PIN | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|
| 2P  | 10.00 | 6.10  | 2.50  |
| 3P  | 12.50 | 8.60  | 5.00  |
| 4P  | 15.00 | 11.10 | 7.50  |
| 5P  | 17.50 | 13.60 | 10.00 |
| 6P  | 20.00 | 16.10 | 12.50 |

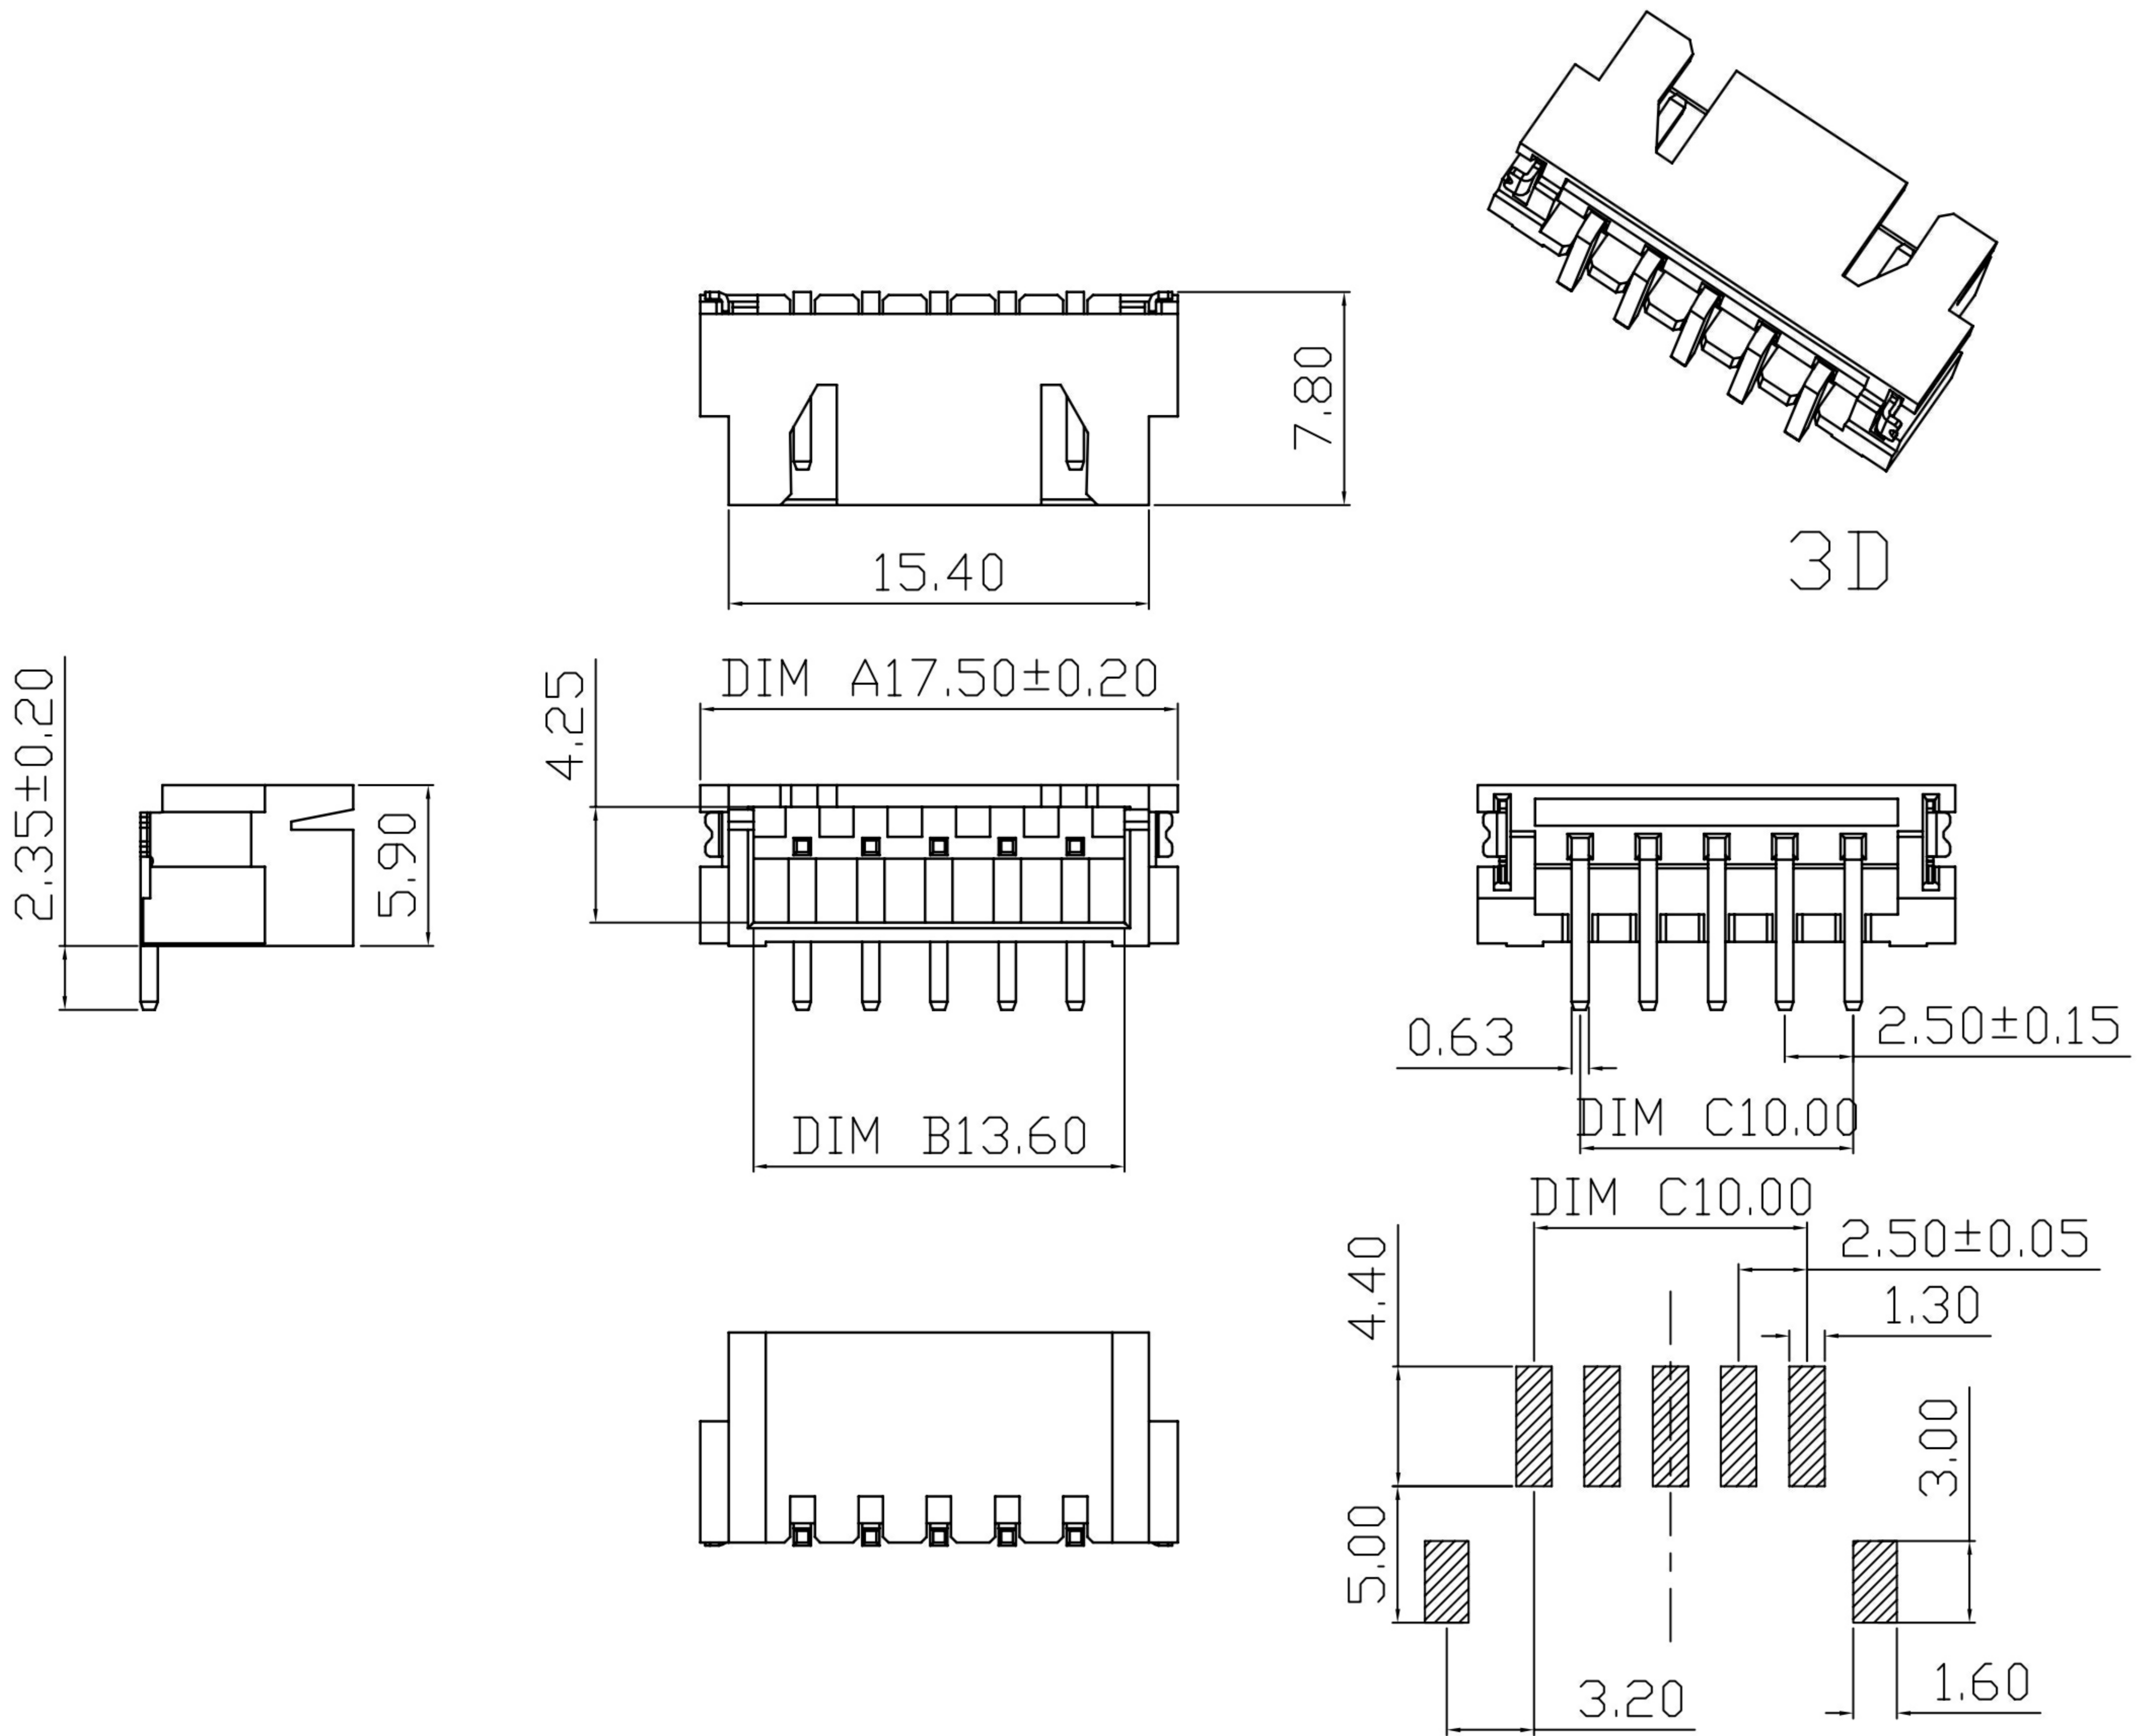

SPECIFICATION

- Contact resistance:  $\leq 10\text{M}\Omega$
- Insulation resistance:  $\geq 1000\text{M}\Omega$
- Rated voltage: 250 V AC DC
- Rated current: 3.0 A AC DC
- Withstand Voltage: 1000V AC/minute
- Temperature Range :  $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$

|    |    |       |       |    |
|----|----|-------|-------|----|
| C  | 插片 | 黄铜H65 | 镀镍锡   |    |
| B  | 插针 | 黄铜H65 | 镀镍锡   |    |
| A  | 基座 | LCP   | 本色    |    |
| 序号 | 品名 | 材质    | 电镀/颜色 | 备注 |

深圳市虹成电子有限公司

|  |                        |            |                 |            |
|--|------------------------|------------|-----------------|------------|
| UNLESS OTHERWISE,<br>GENERAL TOLERANCE:<br>X. xxx ±0.10<br>X. xx ±0.20<br>X. x ±0.30 | NAME:<br>2.54针座5PIN 立贴 |            | P/N: HCZZ0514-5 |            |
|  | THIRD ANGLE PROJECTION |            | UNIT: MM        | SCALE: 1:1 |
|  | SIZE: A4               | SHEET: 1/1 | REV: A1         |            |
| ANGULAR:<br>X. xx° ±1°<br>X. x° ±3°<br>X. ° ±5°                                      | DRAWN:                 |            | CHECKED:        | APPROVED:  |

RECOMMENDER P.C.B.LAYOUT TOP VIEW  
(COMPONENT SIDE TOLERANCE±0.1)