
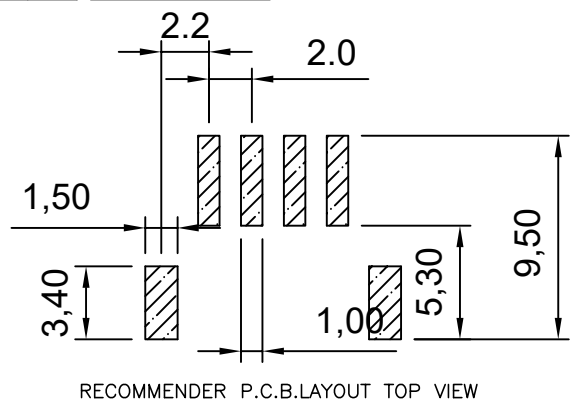
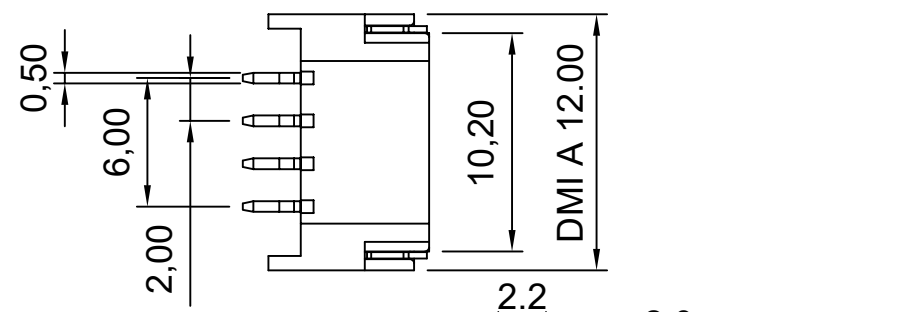


RoHS 2.0

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
AO.	/.	新版发行	2021.11.27	Willming

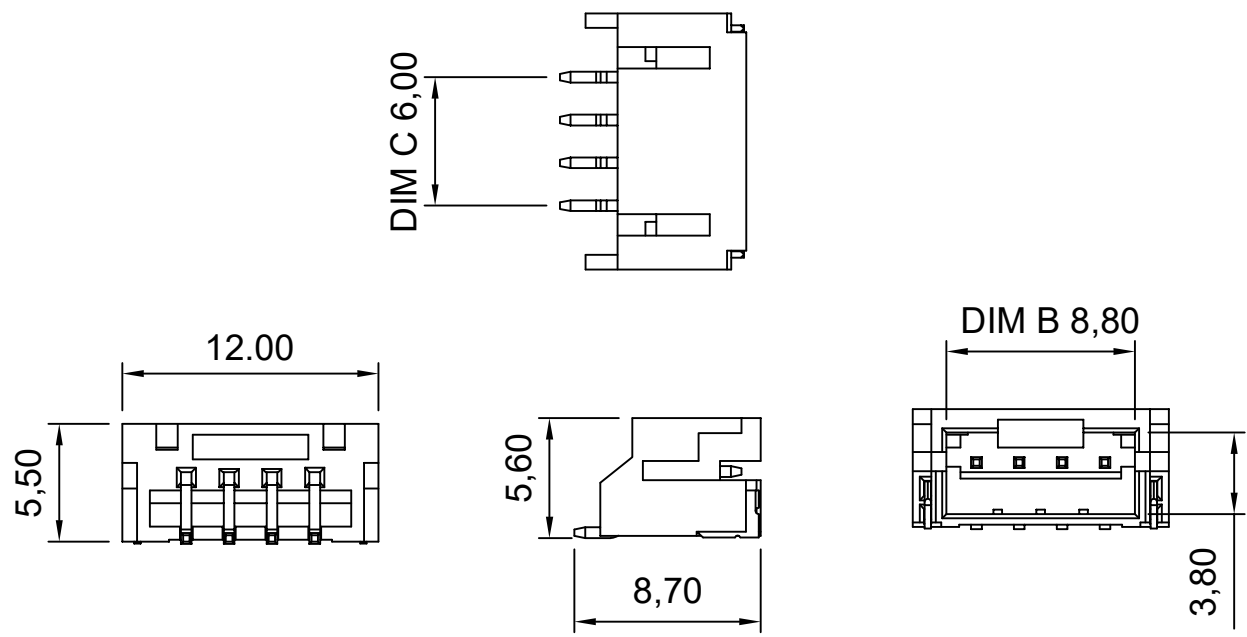

Specifications:

- 1.Rated Voltage:250V AC/DC
- 2.Rated Current:5A AC,DC
- 3.Withstand Voltage: 200V AC/minute
- 4.Contact Resistance : 50mΩ (Max)
- 5.Insulation Resistance:1000MO(MIN)
- 6.Storage Temperature e Range:-40°C~+85°C;
- 7.operation Temperature Range:-25°C~+70°C;

PIN	DIM A	DIM B	DIM C
2P	8.00	4.80	2.00
3P	10.00	6.80	4.00
4P	12.00	8.80	6.00
5P	14.00	10.80	8.00
6P	16.00	12.80	10.00

3	插片	黄铜H65	镀镍锡	
2	插针	黄铜H65	镀镍锡	
1	基座	LCP	蓝色	
序号	品名	材质	电镀/颜色	备注

深圳市虹成电子有限公司

UNLESS OTHERWISE, GENERAL TOLERANCE:
 X. xxx ±0.05
 X. xx ±0.15
 X. x ±0.25

NAME: 针座2.0卧贴4P蓝色
 P/N: HCZZ0451-4L
 DWG NO:

THIRD ANGLE PROJECTION

UNIT:	SCALE	SIZE:	SHEET:	REV.
MM	1:1	A4	1/1	AO

DRAWN: Willming
 CHECKED: Xiao
 APPROVED: Tang