
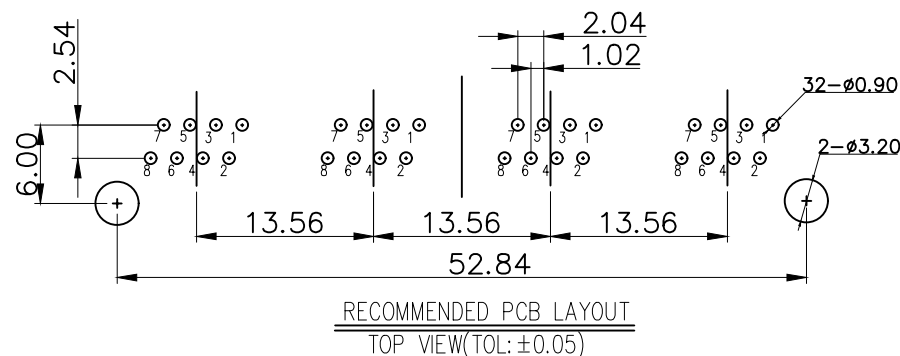
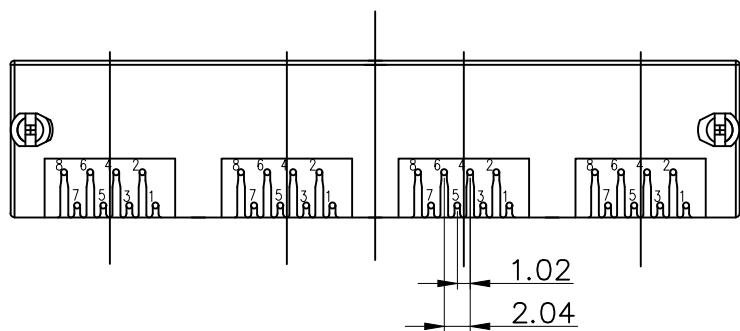
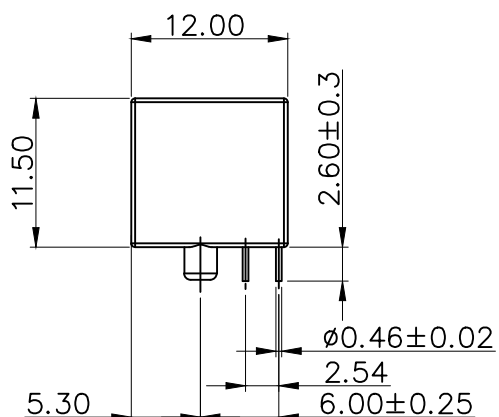
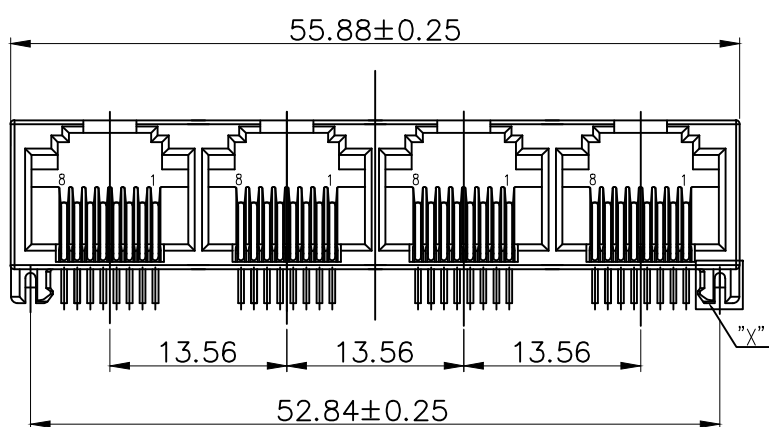
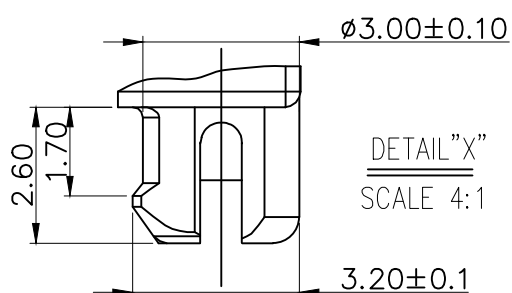
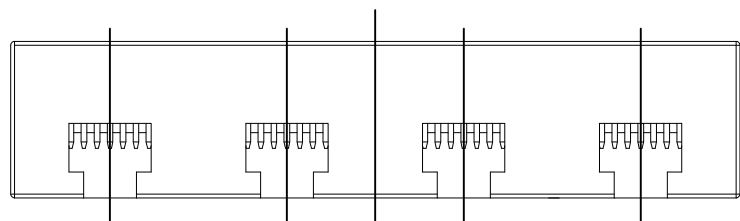
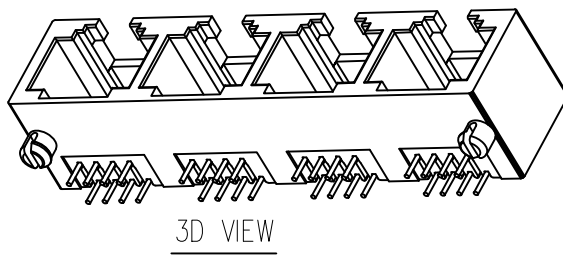


标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

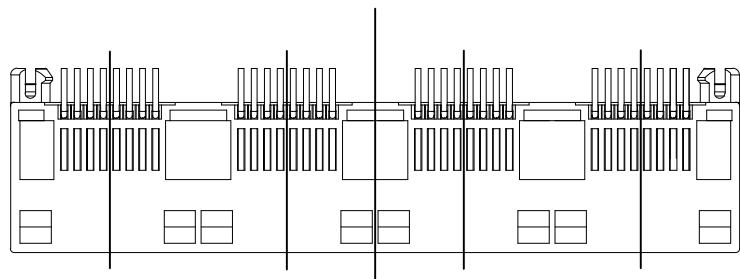

NOTES:

- MATERIAL:
  - HOUSING: PBT ,COLOUR IS YELLOW 7405C;
  - CONTACT: PHOSPHOR BRONZE, $\phi 0.46 \pm 0.02$ mm;
- FINISH: PLATED GOLD OVER NI G/Fu";
- RECINNEBDED PCB THICKNESS: 1.60mm;
- ELECTRICAL:
  - VOLTAGE RATING: 125 VAC RMS;
  - CURRENT RATING: 1.5 AMP;
  - CONTACT RESISTANCE: 35MILLIOHMS MAX.;
  - WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz,1MIN.;
  - INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC;
- MECHANICAL:
  - MATING/UNMATING FORCE: 30N MAX.;
  - RETENTION STRENGTH: 50N MIN.;
  - OPERATING LIFE: 750 CYCLES MIN.;
- SALT SPRAY TEST: 12H;
- SOLDERABILITY: 245 $\pm 5^{\circ}$ C,5 $\pm 0.5$ S;
- RESISTANCE TO SOLDER: 260 $\pm 5^{\circ}$ C,10 $\pm 1$ S;
- ENVIRONMENTAL:
  - STORAGE TEMPERATURE RANGE: -40 $^{\circ}$ C~+85 $^{\circ}$ C;
  - OPERATION TEMPERATURE RANGE: -25 $^{\circ}$ C~+70 $^{\circ}$ C;
- MATES WITH: MODULAR PLUGS THAT CONFORM TO FCC REGULATION PART 68.500;

2	接触	铜	镀金G/F	
1	基座	PBT	黄色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司 TITLE: 网口 PART NO: HC-WK88-MIH12-1X4-Y2		
	UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx $\pm 0.10$ X.xx $\pm 0.20$ X.x $\pm 0.30$ ANGULAR: X.xx $^{\circ}$ $\pm 1^{\circ}$ X.x $^{\circ}$ $\pm 3^{\circ}$ X. $^{\circ}$ $\pm 5^{\circ}$	比列 SCALE <b>1:1</b>	
张数 PART NO 1 OF 1	版本 REV A		