

标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

PIN数	A±0.1	B±0.1	C±0.1
2P	7.60	4.50	1.25
3P	8.85	5.75	2.50
4P	10.10	7.00	3.75
5P	11.35	8.25	5.00
6P	12.60	9.50	6.25

A

B

C

D

E

F

G

A

B







C

D

E

F

G

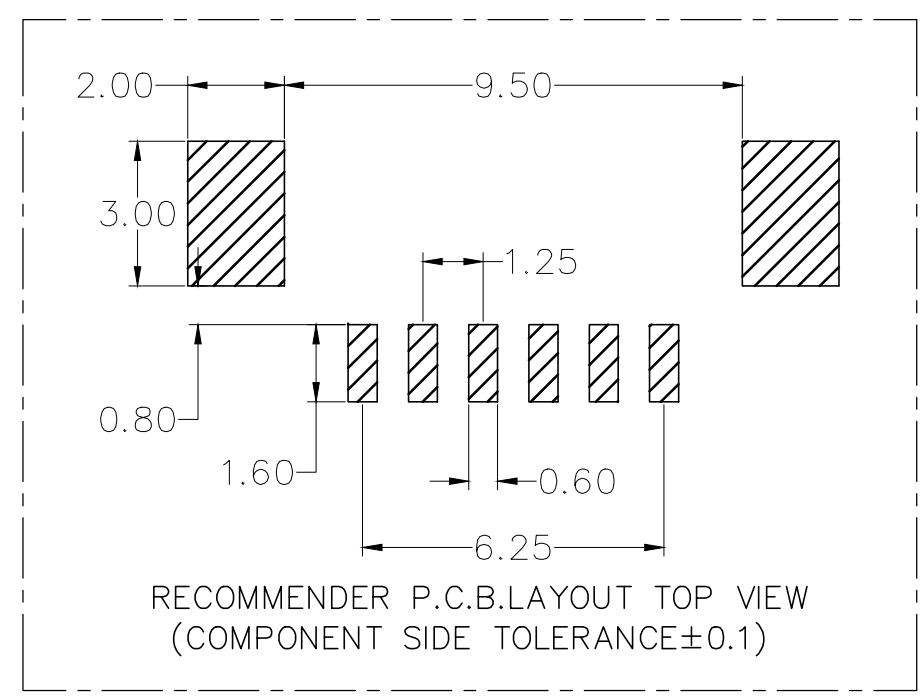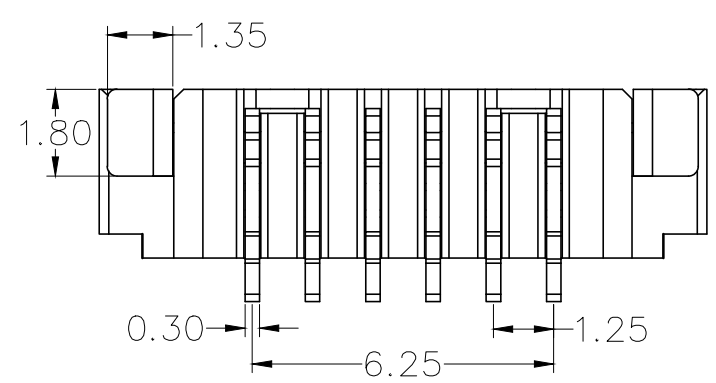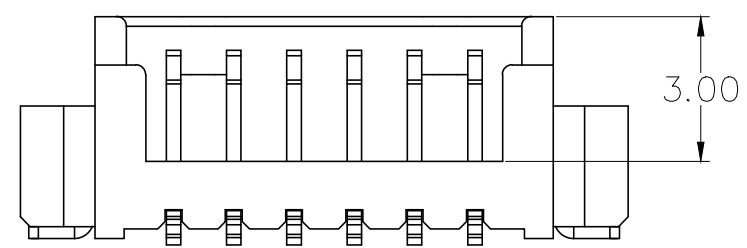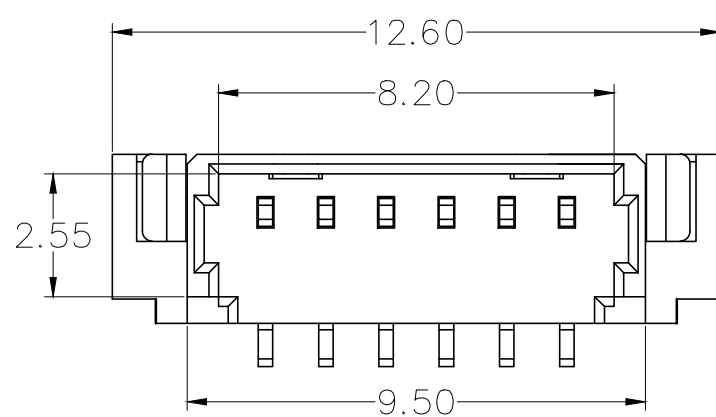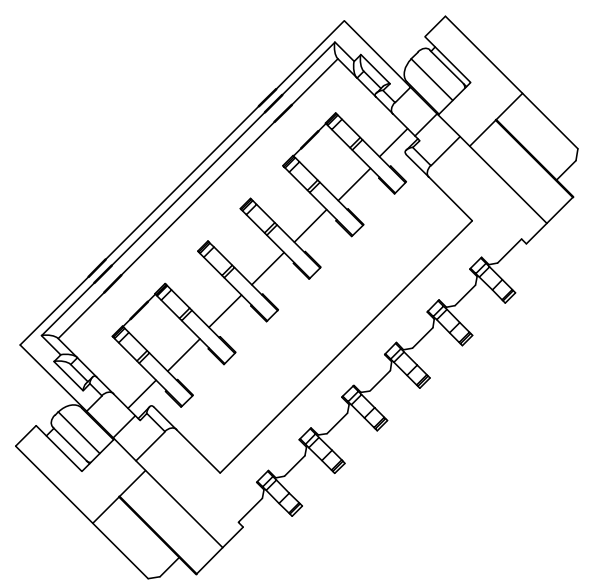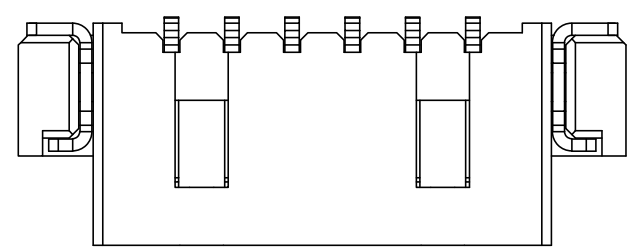

Specifications:

Rated Voltage : 125V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 200V AC/minute  
 Contact Resistance : 50mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Storage Temperature Range: -40°C~+85°C;  
 Operation Temperature Range: -25°C~+70°C;

序号	品名	材质	电镀/颜色	备注
2	插针	铜	镀镍锡	
1	基座	LCP	本色	

深圳市虹成电子有限公司 UNLESS OTHERWISE, GENERAL TOLERANCE: X. xxx ±0.05 X. xx ±0.15 X. x ±0.25 ANGULAR: X. xx° ±1° X. x° ±3° X. ° ±5°	品名 TITLE	针座		
	料号 PART NO	HCZZ0015-6		
比列 SCALE	1:1	制图 DRAW	AhYe	
单位 UNIT	MM	审核 CHECKED	夏操云	
张数 PART NO	1 OF 1	批准 APPROVE	赵亮亮	
版本 REV	A			