
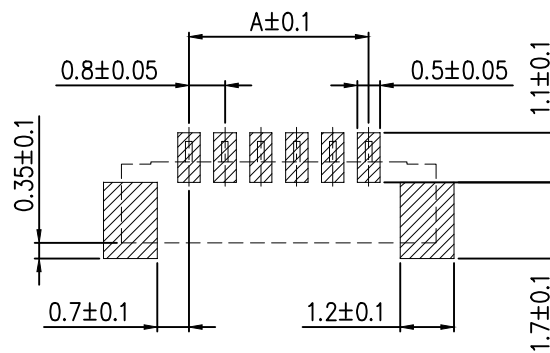

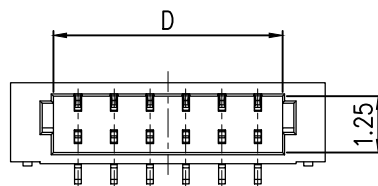
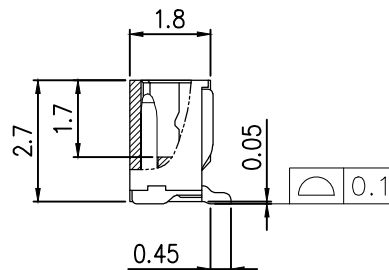




标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

PIN	尺寸 (mm)			
	A	B	C	D
02	0.80	3.04	3.80	1.90
03	1.60	3.84	4.60	2.70
04	2.40	4.64	5.40	3.50
05	3.20	5.44	6.20	4.30
06	4.00	6.24	7.00	5.10
07	4.80	7.04	7.80	5.90
08	5.60	7.84	8.60	6.70
09	6.40	8.64	9.40	7.50
10	7.20	9.44	10.2	8.30
11	8.00	10.24	11.0	9.10
12	8.80	11.04	11.8	9.90
13	9.60	11.84	12.6	10.7
14	10.4	12.64	13.4	11.5
15	11.2	13.44	14.2	12.3
16	12.0	14.24	15.0	13.1

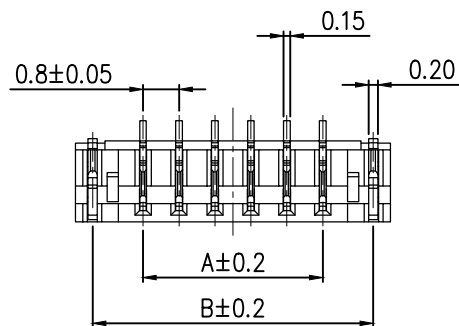

PCB Layout

技术要求:

额定电流: 0.7A AC,DC

额定电压: 30V AC

温度范围: -40° C~+85° C

接触电阻: ≤0.03 Ω

绝缘电阻: ≥100M Ω

耐 压: 200V AC/min

2	接触	铜	镀锡	
1	基座	LCP	米色	
序号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	针座
料 号 PART NO	HC-SURO. 8-2PLT

GENERAL TOLERANCES
(UNLESS SPECIFIED)比 例
SCALE

1:1

X.±0.30	X.±5°
.X±0.25	.X±3°
.XX±0.20	.XX±1°

单 位 UNIT	MM
张 数 PART NO	1 OF 1
版 本 REV	A

制 图 DRAW	AhYe
审 核 CHECKED	夏操云
批 准 APPROVE	赵亮亮

